

Miller HP Series Non-Stretch Harnesses

Models: 850T Family

Materials

Webbing	1 3/4" Polyester
Minimum Tensile	5000 lbs. on webbing
Thread:	6 cord bonded 3 strand polyester thread. Minimum tensile of 42 lbs.
Label Materials	Valeron
Grommets	Brass
Hardware	Steel Minimum Tensile strength
D-Ring	5000 lbs. (22kN)
Buckles	4000 lbs. (18kN)


* All hardware meets ASTM (50) fifty-hour salt spray test requirements.

Technical

Max Working Load: 400 lbs (181.4 kg)

Certification

Meets applicable OSHA, ANSI and CSA requirements

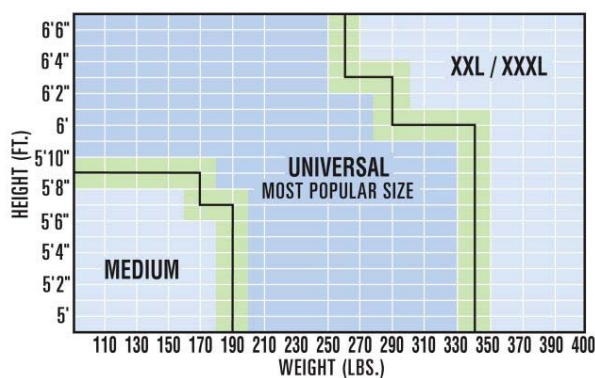

Model	Sizes	Back D-Ring	Front D-Ring	Side D-Rings	Shoulder Strap	Leg Strap	Chest Strap	Sub-Pelvic Strap	Special Features
Pull-Down Adjustment Style									
850T/UGN	U	Yes	No	No	Friction Buckles	Mating Buckles	Mating Buckles	Yes	Pull-free lanyard rings
850T-4/UGN	U	Yes	No	No	Friction Buckles	Tongue Buckles	Mating Buckles	Yes	Pull-free lanyard rings
850T-7/UGN	U	Yes	No	Yes	Friction Buckles	Mating Buckles	Mating Buckles	Yes	Pull-free lanyard rings
850T-58/UGN	U	Yes	No	Yes	Friction Buckles	Tongue Buckles	Mating Buckles	Yes	Pull-free lanyard rings

Model numbers listed are for universal size. Harnesses are also available in small/medium and XXLarge, by replacing the "U" in the model number with "S/M" or "XXL". Note: For front D-ring vest-style option, add "FD" to the corresponding harness model number (Ex: 650TFD/UGN).



Toll Free 800-873-5242 • Phone 814.432.2118 • Fax 814.437.2973 • www.millerfallprotection.com

WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM MILLER FALL PROTECTION AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. MILLER FALL PROTECTION RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.