

# The Air-Light™ System

## Choose a light assembly to meet your application



Model No.	Description
<b>LED Cube Light Models</b>	
AL2CUBEBP	Air-Light™ Dual Cube LED Light Assembly - Includes internal battery pack and 3 amp battery charger and cables
AL4CUBEBP	Air-Light™ Quad Cube LED Light Assembly - Includes internal battery pack and 3 amp battery charger and cables
<b>Night Vision Models</b>	
AL2C-IR850	Air-Light™ Dual Cube Light Assembly - Includes internal battery pack and 3 amp battery charger, 850 nm output light spectrum for night vision
AL2C-IR940	Air-Light™ Dual Cube Light Assembly - Includes internal battery pack and 3 amp battery charger, 940 nm output light spectrum for night vision
AL4C-IR850	Air-Light™ Quad Cube Light Assembly - Includes internal battery pack and 3 amp battery charger, 850 nm output light spectrum for night vision
AL4C-IR940	Air-Light™ Quad Cube Light Assembly - Includes internal battery pack and 3 amp battery charger, 940 nm output light spectrum for night vision
<b>Magnetic Hand-held Single Cube LED Light</b>	
ALHL25	LED Hand Light, 25ft. cord with power port male adapter

**Additional LED cubes can be added to your assembly as needed. Contact Customer Service.**

## Accessories / Kits


Model No.	Description
ALHL25	<b>Magnetic Hand-Held Single Cube LED Light</b> LED Hand Light, 800 lumen, 25ft. cord with power port male adapter
ERVK-15DC	<b>Emergency Response Ventilation Kit</b> AL1 MCBP Mini-Cube™ LED light and CVF-15DCAN fan with SB® connector
<b>Charging Cord Sets</b>	
LP-PC-DE	Dual end power port connector cable, 8ft.
C7-PC-USA	7ft. DC charge cord to AC - United States
C7-PC-EUR	7ft. DC charge cord to AC - Europe
C7-PC-UK	7ft. DC charge cord to AC - United Kingdom
C7-PC-AUS	7ft. DC charge cord to AC - Australia

## Hand Held LED Light

### Specifications:

- 12 VDC, .75amps, 10 watts, 800 Lumens
- Anodized aluminum housing with polycarbonate lens
- Operating temperature, -40°C to 85°C; -40°F to 140°F
- 25 ft power cord with male power port connector
- Ergonomically designed polyethylene pistol grip
- Magnet rated @ 30 lbs. with adjustable base

### Power Port Connection

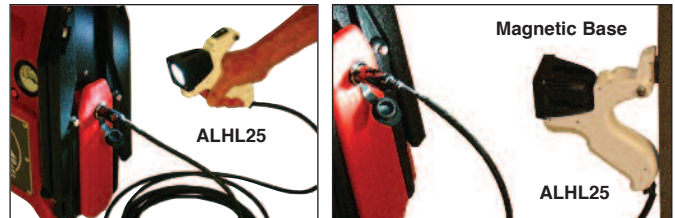

## Emergency Response Ventilation Kit

Environmentally Friendly Products



Emergency response ventilation and high output DC lighting for a full 2 hour simultaneous fan and light run time.

See details on page 55

## Charging cord sets supplied with all Air-Light™ Models



LP-PC-DE

115 VAC  
Power Cable  
C7-PC-USA

[Air Systems AL2C-IR850 Air Light System ALS DC LED Lighting](#)

[Air Systems AL2C-IR940 Air Light System ALS DC LED Lighting](#)

[Air Systems AL2CUBEBP Air Light System ALS DC Portable LED Lighting](#)

[Air Systems AL4C-IR850 Air Light System ALS DC LED Lighting](#)

[Air Systems AL4C-IR940 Air Light System ALS DC LED Lighting](#)