




S19-310HFP Frost-Proof Drench Shower and Eye/Face Wash Unit

Standard Equipment

SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic. SpinTec drench showerhead features integral 26 GPM flow control, conserving water and helping to accurately size your tepid water system.

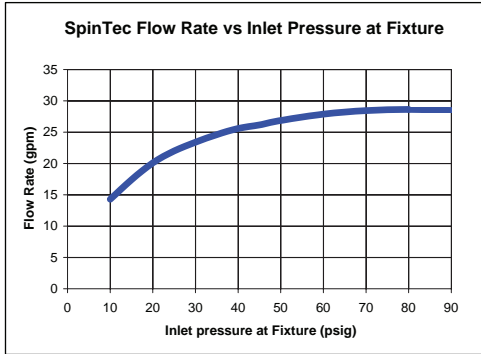

Shower Valve

Chrome-plated brass 1" NPT stay-open ball valve. Operated by a stainless steel pull rod with triangular handle.

Eye/Face Wash Sprayhead Assembly

Twin perforated-disc eye/face wash heads with protective sprayhead covers, operated by a large, highly visible stainless steel push handle. Safe, steady water flow under varying water supply conditions from 30–90 PSI is assured by integral flow control in the sprayhead assembly.

Frost-Proof Shower and Eye/Face Wash Valve (Simultaneous Operation)

1" NPT stay-open valve. Hand operated by a large, highly visible stainless steel push handle.

Pipe and Fittings

Galvanized steel protected with BradTect® safety yellow coating. Standard depth is 36". Special order for other bury depths.(18"–48"–60"–72").



Special order depths are non-returnable.

Water Supply


1¼" NPT.



Local codes may require the installation of a backflow prevention valve to complete proper installation. Compliance with local codes is the responsibility of the installer. Valve must be tested annually to verify that it is functioning properly. Backflow prevention valves are not included with the fixture and may be supplied by the contractor or purchased from Bradley Corporation.



S19-310HFP
Frost-Proof Drench Shower and Eye/Face Wash Unit

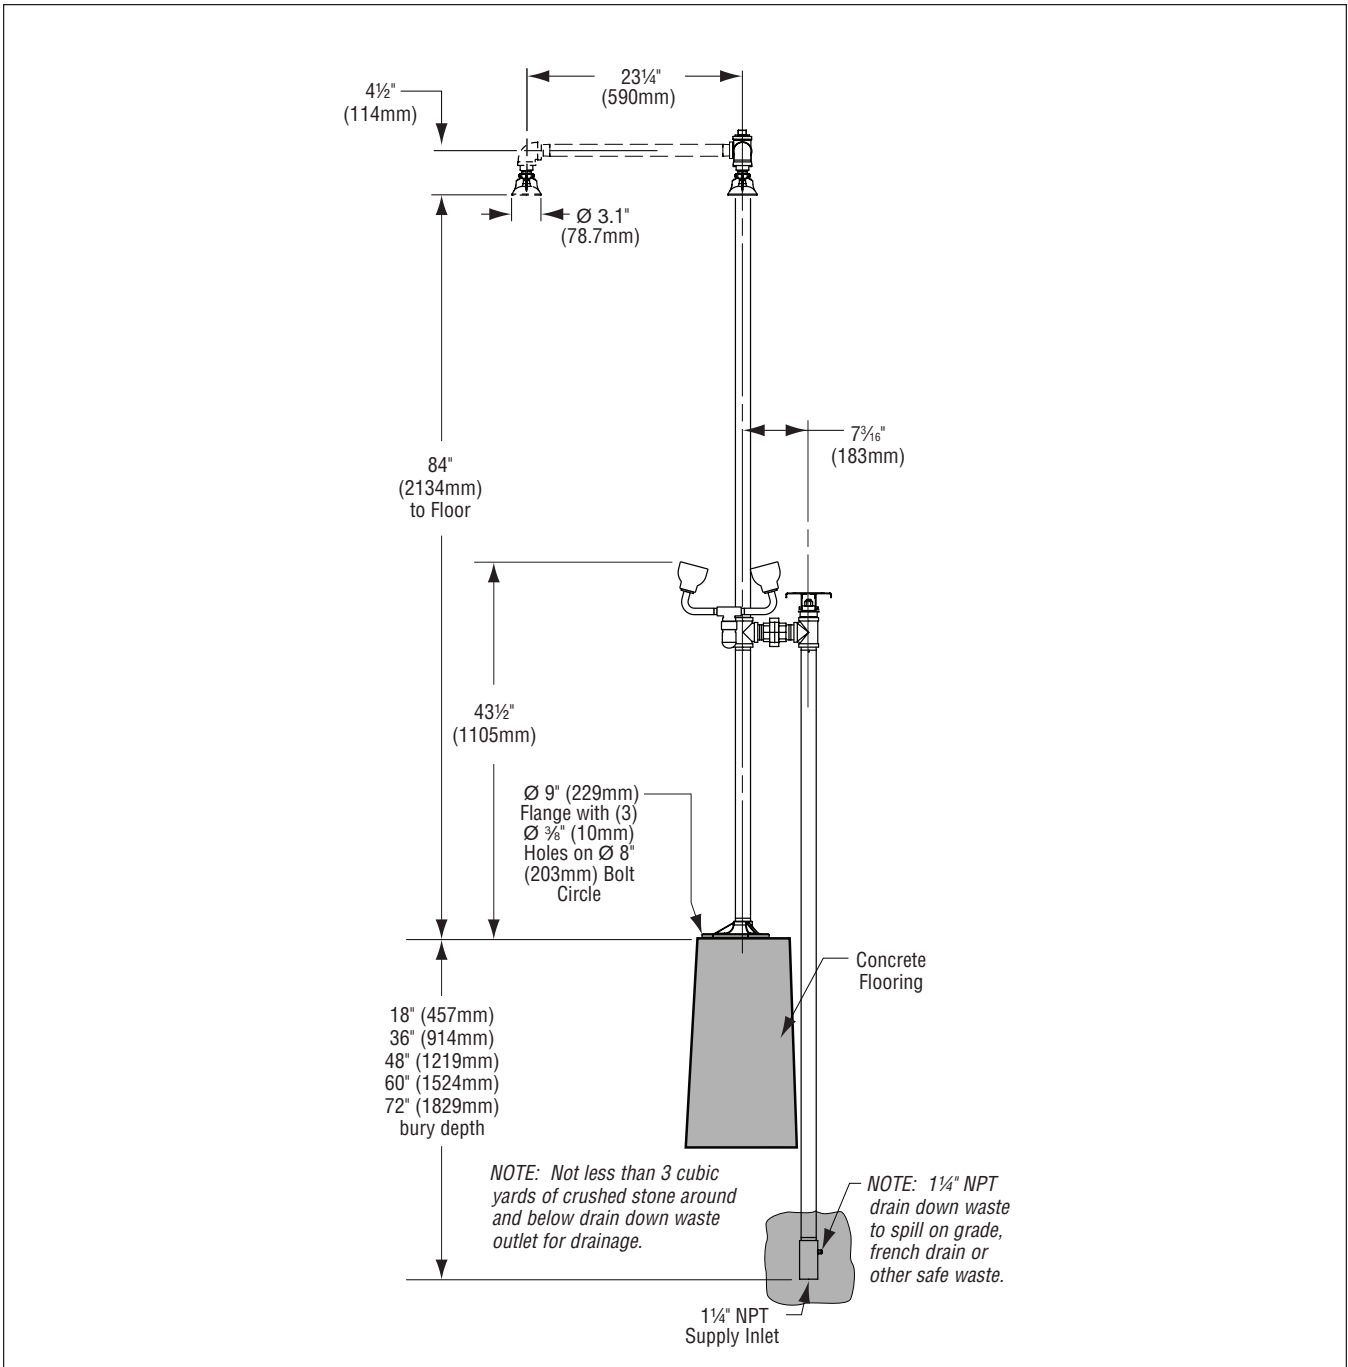

All dimensions assume standard thread engagement. Variations in manufacturing allow for +/- 1/8" (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by 1/8" (3mm).