

Insulation Blowing Machine

Complete Portability

The FiberForce's two piece design, light weight, and built in handles and wheels provide the ability to transport in almost any vehicle and access any jobsite. The removable hopper has a hinged shelf to simplify product loading while minimizing aisle and transportation space requirements.

High Production Rates

One hour install of R-19 cellulose or fiberglass in a 1500 square foot attic is made possible by its high production rates.

Ease of Use

The wireless remote enables operation from the installation location without the requirement of taking a cord with you.



System shown with **standard** wireless remote, LED power cord, & 100 feet of hose.

The finest Do-It-Yourself portable insulation machine on the market, just see why!

- ✓ **Polyethylene construction: lightweight, rust-free, and extremely durable.**
- ✓ **1-15amp 115V circuit simplifies power requirement.**
- ✓ **Quick-connect hose connectors.**
- ✓ **Slide gate enables blow behind netting & dense pack in addition to attics.**
- ✓ **Urethane seals last 2-3X longer than belted rubber seals providing high production rates with less required maintenance.**
- ✓ **Stainless steel airlock plates create a virtually indestructible airlock.**
- ✓ **Hopper options to increase system capacity as beneficial with desired use.**

Rev: 20130423

Please visit with us for additional products and services.



Contractor Systems



Nozzles & Swivel
Hose Connectors



DIY'er Systems



Vacuums & Generators

[Intec Fiber Force \(Shown w/ hose & cord\)](#)

[Intec Fiber Force 50004-00 Insulation Blowing Machine](#)

[Intec Fiber Force 50005-00 Canadian Insulation Blowing Machine](#)

[Intec Fiber Force 50009-00 Canadian \(Quebec\) Insulation Blowing Machine](#)

[Intec Fiber Force 500011-00 Canadian Insulation Blowing Machine](#)

[Intec Fiber Force 500013-00 Insulation Blowing Machine](#)

Specifications



- Weight: 142lbs (64.5kg) standard hopper
153lbs (69.5kg) optional tall hopper
- Hose outlet: 2-1/2 inches (6.4cm)
- Electrical: 115VAC @14amps
- Power Cord: 1 - 12/3 gauge twist lock 50' (15.2m)
with LED indicators indicating power transmission

High Production Rates:

- 42 bags/hr cellulose; 1050 lbs/hr (477kg/hr)
- 13 bags/hr fiberglass; 400 lbs/hr (182kg/hr)

Hopper Options

Standard

- ✓ Smaller footprint
- ✓ Enhanced portability

Tall

- ✓ Increased hopper capacity
- ✓ Larger working platform



Machine Features



Two piece polyethylene construction enhances portability



Quick-Connect hose



Quick-clean filter & access panels simplify maintenance



Fold-down shelf provides generous loading platform



Industrial grade wireless remote compliments ease of operation



Slide Gate adds to application versatility

Accessories



Swivel hose connectors




Wall fill kits

**Backed by Intec's industry leading Technical Service.
Training & Accessories are available to increase your efficiencies.**

The Intec Pledge

Provide the finest equipment in the industry with the highest standards while continuing to strive for 100% satisfaction.

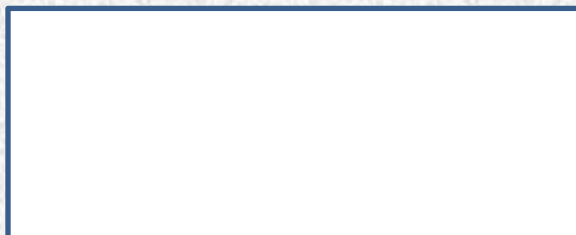

Manufactured By